



## FTTx Fiber Optic Wall Outlets

**Fiber optic wall outlet (FWT)** also named as Fiber Optic Socket/Faceplate, is mini fiber organizers used to create a fiber connection point inside the home or office. The Fiber termination outlet is used for wall mounted or desktop applications and provides 1FO, 2FO or 4FO splicing with SC or LC connector. These fiber optic outlets are our leading products which specially developed for FTTH solution, and have been exported to many European, African and South American countries based on high quality and attractive price.


### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-301A</b>	
Outside dimension	86*86*23mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	2 outlets	
Number of adapters	2pcs SC Simplex	
Splice Capacity	2 fibers	


### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-301B</b>	
Outside dimension	86*86*25mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	1 outlets	
RJ45 Modular	2*RJ45	
Number of adapters	1pcs SC Simplex	
Splice Capacity	1 fibers	


### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-301C</b>	
Outside dimension	90*50*18mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	1 outlets	
Number of adapters	1pcs SC Simplex	
Splice Capacity	1 fibers	


### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-301D</b>	
Outside dimension	148*90*15mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	2 outlets	
Number of adapters	1pcs SC Simplex	
Splice Capacity	1 fibers	

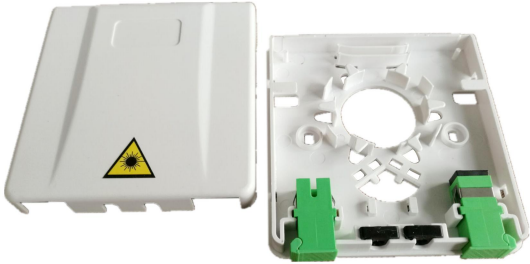
### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-301E</b>	
Outside dimension	86*86*22mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	1 outlets	
Number of adapters	1pcs SC Simplex	
Splice Capacity	1 fibers	


### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-301F</b>	
Outside dimension	86*86*23mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	2 outlets	
Number of adapters	2pcs SC Simplex	
Splice Capacity	2 fibers	

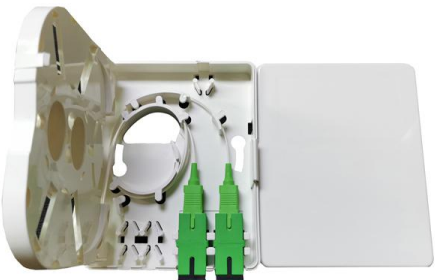
### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-302A</b>	
Outside dimension	100*95*14mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	2 outlets	
Number of adapters	2pcs SC Simplex	
Splice Capacity	2 fibers	


### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-302B</b>	
Outside dimension	105*82*22mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	2 outlets	
Number of adapters	2pcs SC Simplex	
Splice Capacity	2 fibers	

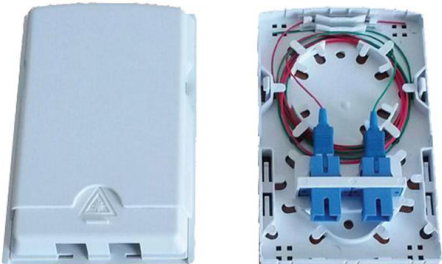
### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-302C</b>	
Outside dimension	100*80*23mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	2 outlets	
Number of adapters	2pcs SC Simplex	
Splice Capacity	2 fibers	


### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-302D</b>	
Outside dimension	115*86*23mm	
Material of Box body	Flame-resistant ABS+PC	
Cable Outlet	2 outlets	
Number of adapters	1pcs SC Simplex or 1pcs SC Duplex	
Splice Capacity	1, 2 fibers	

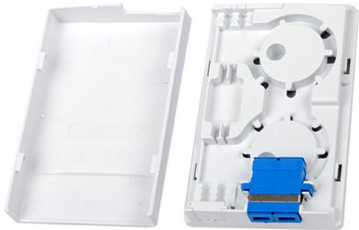
### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-302E</b>	
Outside dimension	130*83*24mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	2 outlets	
Number of adapters	2pcs SC Simplex	
Splice Capacity	2 fibers	

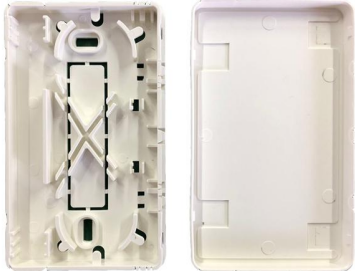
### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-302F</b>	
Outside dimension	205*115*35mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	2 outlets	
Number of adapters	2pcs SC Simplex	
Splice Capacity	2 fibers	

### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-302G</b>	
Outside dimension	120*80*23mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	2 outlets	
Number of adapters	1pcs SC Duplex	
Splice Capacity	2 fibers	

### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-302H</b>	
Outside dimension	117*70*16mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	2 outlets	
Number of adapters	2pcs SC Simplex	
Splice Capacity	2 fibers	

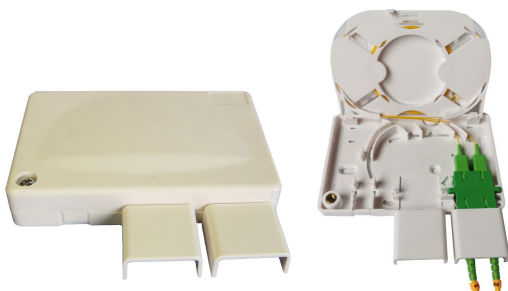
### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-304A</b>
Outside dimension	150*110*30mm
Material of Box body	Flame-resistant ABS plastic
Cable Outlet	4 outlets
Number of adapters	4pcs SC Simplex
Splice Capacity	4 fibers



### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-304AC</b>
Outside dimension	120*80*25mm
Material of Box body	Flame-resistant ABS plastic
Cable Outlet	2 outlets
Number of adapters	2pcs SC Duplex
Splice Capacity	4 fibers



### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-304B</b>
Outside dimension	100*80*29mm
Material of Box body	Flame-resistant ABS plastic , PC
Cable Outlet	4 outlets
Number of adapters	4pcs SC Simplex
Splice Capacity	1, 2, 4 fibers



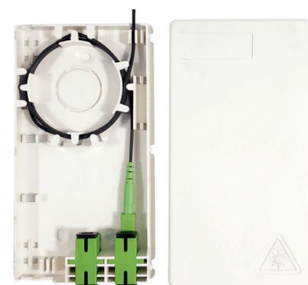
### P/N and Specifications

<b>Item No.</b>	<b>FLK-FWT-304C</b>
Outside dimension	140*105*28mm
Material of Box body	Cold rolled steel
Cable Outlet	2 outlets
Number of adapters	4pcs SC Simplex
Splice Capacity	4 fibers




### P/N and Specifications


<b>Item No.</b>	<b>FLK-FWT-304D</b>
Outside dimension	164*90*24mm
Material of Box body	Flame-resistant ABS plastic
Cable Outlet	4 outlets
Number of adapters	4pcs SC Simplex
Splice Capacity	4 fibers




### P/N and Specifications

Item No.	FLK-PTO-304B	
Reel dimension	395*245*130mm	
ONT Kits	Pre-terminated Wall Outlet with Drop Cable	
Wall outlet	FLK-FWT-304B	
Number of adapters	4pcs SC Simplex	
Cable Outlet	4 outlets	
Drop Cable	SM G657A1 or A2 (1-4fibers)	
Splice Capacity	1, 2, 4 fibers	
Din Rail frame	1 pcs (Optional)	


### P/N and Specifications

Item No.	FLK-FWT-308C	
Outside dimension	200*150*30mm	
Material of Box body	Cold rolled steel	
Cable Outlet	2 outlets	
Number of adapters	8pcs SC Simplex	
Splice Capacity	8 fibers	

### P/N and Specifications

Item No.	FLK-FWT-316C	
Outside dimension	245*200*48mm	
Material of Box body	Cold rolled steel	
Cable Outlet	2 outlets	
Number of adapters	16pcs SC Simplex	
Splice Capacity	16 fibers	

### P/N and Specifications

Item No.	FLK-FWT-308A	
Outside dimension	198*130*29mm	
Material of Box body	Flame-resistant ABS plastic	
Cable Outlet	8 outlets	
Number of adapters	8pcs SC Simplex	
Splice Capacity	8 fibers	